TMP light

Scheda tecnica - Strisce LED

S196

Potenza massima 18,0W **Nr. Led/m** 196



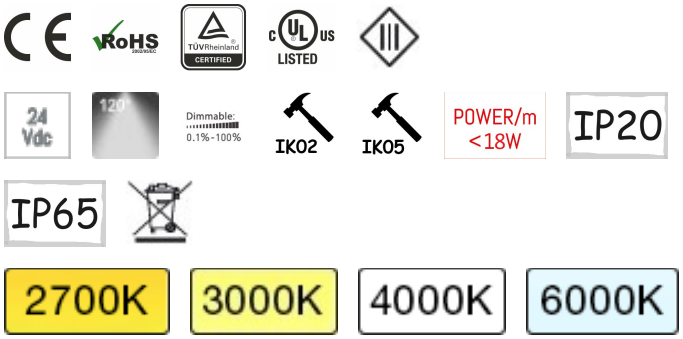


Descrizione

Striscia a LED di alta intensità luminosità e potenza, con indice cromatico superiore a 90.

Adatta per applicazioni di illuminazione in ambienti asciutti. La distribuzione dei LED (196LED/m) consente una emissione luminosa costante.

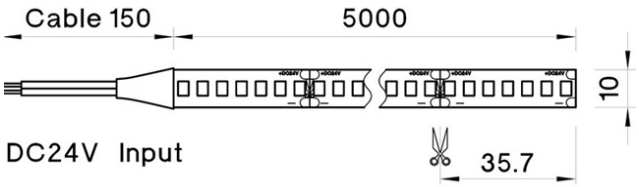
Il tracciato in rame di alta qualità ed elevato spessore permette alle strisce di ottenere alte prestazioni in dimensioni ridotte, mantenendo comunque inalterata la flessibilità del prodotto e la facilità del montaggio.



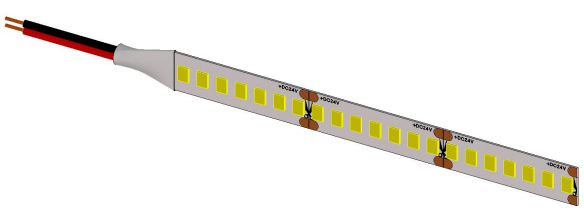
Certificazioni	CE , RoHS , TUV , UL , INTERTEK
CRI	Ra>90
Alimentazione	24,0Vdc
Gradi lente	120°
Potenza massima	18,0W
Nr. Led/m	196
Dimmerabile	✔
Sezionabile	35,7mm
Lumen/Watt	114
Dimensione mm	5000 x 10 x 1.5
Modello led	2835
Attacco	Cavo
MacAdam	SDCM<3
Confezione	Bag
Classe energetica	F
Grado IP	IP20 , IP65
Grado IK	IK02 , IK05

Dati calcolati al metro

Disegno tecnico



Disegno tecnico 3D



FEB S.r.l. unipersonale - Via Paolo VI, 3 - 20020 Magnago (MI) - Tel: +39 03311855050 - Email: info@febtrade.com - P.IVA 09641910964

Componenti

Modelli

Codice	Descrizione	Lumen/m	Colore Luce	Energy label
S196L28G2024	Strip 196led/m 2835, 18W 2700K 24Vdc CRI>90 IP20 (Rolla 5mt)	1800lm	Warm White, 2700K	
S196L28C2024	Strip 196led/m 2835, 18W 3000K 24Vdc CRI>90 IP20 (Rolla 5mt)	1890lm	Warm White, 3000K	
S196L28C6524	Strip 196led/m 2835, 18W 3000K 24Vdc CRI>90 IP65 (Rolla 5mt)	1890lm	Warm White, 3000K	
S196L28N2024	Strip 196led/m 2835, 18W 4000K 24Vdc CRI>90 IP20 (Rolla 5mt)	1998lm	Natural White, 4000K	
S196L28N6524	Strip 196led/m 2835, 18W 4000K 24Vdc CRI>90 IP65 (Rolla 5mt)	1998lm	Natural White, 4000K	
S196L28F2024	Strip 196led/m 2835, 18W 6000K 24Vdc CRI>90 IP20 (Rolla 5mt)	2052lm	Cold White, 6000K	


Componenti aggiuntivi


	Codice	Descrizione


Confronto modelli


	S196L28G2024	S196L28C2024	S196L28C6524	S196L28N2024	S196L28N6524	S196L28F2024
Lumen/m	1800lm	1890lm	1890lm	1998lm	1998lm	2052lm
Gradi Kelvin	2700K	3000K	3000K	4000K	4000K	6000K
Colore Luce	Warm White, 2700K	Warm White, 3000K	Warm White, 3000K	Natural White, 4000K	Natural White, 4000K	Cold White, 6000K
Certificazioni	CE,RoHS,TUV,UL,INTERTEK	CE,RoHS,TUV,UL,INTERTEK	CE,RoHS,TUV,UL,INTERTEK	CE,RoHS,TUV,UL,INTERTEK	CE,RoHS,TUV,UL,INTERTEK	CE,RoHS,TUV,UL,INTERTEK
CRI	Ra>90	Ra>90	Ra>90	Ra>90	Ra>90	Ra>90
Alimentazione	24,0Vdc	24,0Vdc	24,0Vdc	24,0Vdc	24,0Vdc	24,0Vdc
Gradi lente	120°	120°	120°	120°	120°	120°
Potenza massima	18,0W	18,0W	18,0W	18,0W	18,0W	18,0W
Nr. Led/m	196	196	196	196	196	196
Dimmerabile	✔	✔	✔	✔	✔	✔
Sezionabile	35,7mm	35,7mm	35,7mm	35,7mm	35,7mm	35,7mm
Lumen/Watt	100	105	105	111	111	114
Dimensione mm	5000mm	5000mm	5000mm	5000mm	5000mm	5000mm
Modello led	2835	2835	2835	2835	2835	2835
Attacco	Cavo	Cavo	Cavo	Cavo	Cavo	Cavo
MacAdam	SDCM<3	SDCM<3	SDCM<3	SDCM<3	SDCM<3	SDCM<3
Confezione	Bag	Bag	Bag	Bag	Bag	Bag
Classe energetica	F	F	F	F	F	F
Grado IP	IP20	IP20	IP65	IP20	IP65	IP20
Grado IK	IK02	IK02	IK05	IK02	IK05	IK02

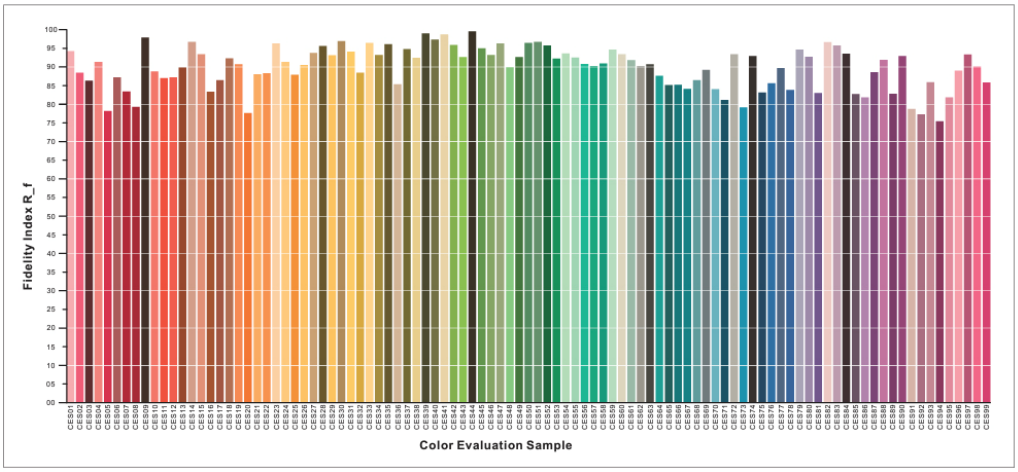
CRI 90+


Spectral power distribution
Ref Source
Spectrum
WaveLength(nm)


Color Rendering Index R_a
Color Evaluation Sample


Rf-Rg relationship
Rg
Rf


Color vector graphic


Fidelity Index R_f
Color Evaluation Sample