TMP light

Scheda tecnica - Strisce LED

S2216K

Potenza massima 9,0W **Nr. Led/m** 182








Descrizione


Striscia a LED superslim ad altissima luminosità e potenza, con indice cromatico superiore a 97, per far risaltare il corretto colore di quanto viene illuminato. Adatta per applicazioni decorative o illuminazione. La distribuzione ravvicinata dei LED (182LED/m) consente una emissione luminosa intensa ed uniforme. Il tracciato in rame ultrasottile da 4mm di alta qualità ed elevato spessore permette alle strisce di ottenere alte prestazioni in dimensioni ridotte, mantenendo comunque inalterata la flessibilità del prodotto e la facilità del montaggio.
La versione IP20 è predisposta per il trattamento in IP54.

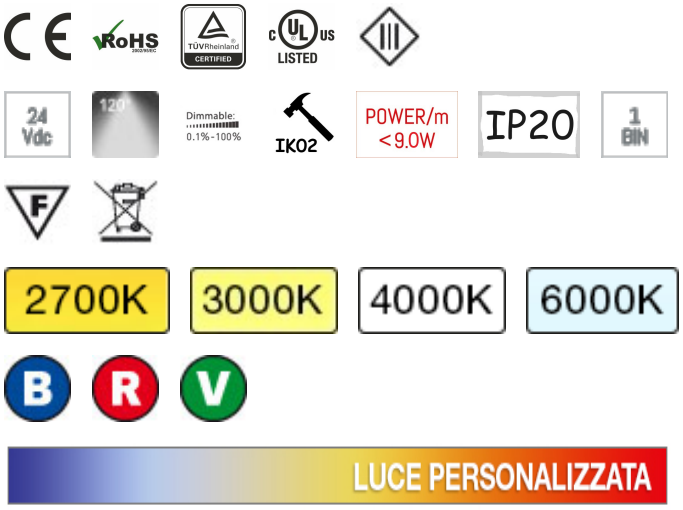


Certificazioni	CE , RoHS , TUV , UL , F
CRI	Ra>90
Alimentazione	24,0Vdc
Gradi lente	120°
Potenza massima	9,0W
Nr. Led/m	182
Dimmerabile	✔
Sezionabile	38,5mm
Lumen/Watt	94
Dimensione mm	5000 x 4 x 1.2
Modello led	2216
Attacco	Cavo
MacAdam	SDCM<3
Confezione	Bag
Classe energetica	G , F
Grado IP	IP20
Grado IK	IK02

Dati calcolati al metro

Disegno tecnico

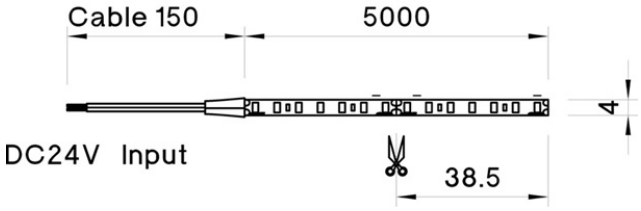

Disegno tecnico 3D

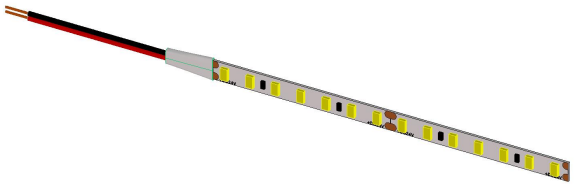

FEB S.r.l. unipersonale - Via Paolo VI, 3 - 20020 Magnago (MI) - Tel: +39 03311855050 - Email: info@febtrade.com - P.IVA 09641910964

Componenti

Modelli

Codice	Descrizione	Lumen/m	Colore Luce	Energy label
S2216SKS220A	Strip 182 led/m 2216, <9W, IP20, 1800K, 24V, CRI>90, 4mm (rolla 5m)	783lm	Warm White, 1800K	
S2216SKS220T	Strip 182 led/m 2216, <9W, IP20, 2100K, 24V, CRI>90, 4mm (rolla 5m)	819lm	Warm White, 2100K	
S2216SKS220G	Strip 182 led/m 2216, <9W, IP20, 2700K, 24V, CRI>90, 4mm (rolla 5m)	873lm	Warm White, 2700K	
S2216SKS220C	Strip 182 led/m 2216, <9W, IP20, 3000K, 24V, CRI>90, 4mm (rolla 5m)	873lm	Warm White, 3000K	
S2216SKS220N	Strip 182 led/m 2216, <9W, IP20, 4000K, 24V, CRI>90, 4mm (rolla 5m)	945lm	Natural White, 4000K	
S2216SKS220S	Strip 182 led/m 2216, <9W, IP20, 5000K, 24V, CRI>90, 4mm (rolla 5m)	945lm	Cold White, 6000K	
S2216SKS220F	Strip 182 led/m 2216, <9W, IP20, 6500K, 24V, CRI>90, 4mm (rolla 5m)	996lm	Cold White, 6000K	
S2216SKS220B	Strip 182 led/m 2216, <9W, IP20, Blu, 24V, CRI>90, 4mm (rolla 5m)		Blue light	
S2216SKS220R	Strip 182 led/m 2216, <9W, IP20, Rosso, 24V, CRI>90, 4mm (rolla 5m)		Red light	
S2216SKS220V	Strip 182 led/m 2216, <9W, IP20, Verde, 24V, CRI>90, 4mm (rolla 5m)		Green light	


Componenti aggiuntivi

	Codice	Descrizione

Confronto modelli


	S2216SKS220A	S2216SKS220T	S2216SKS220G	S2216SKS220C	S2216SKS220N	S2216SKS220S	S2216SKS220F	S2216SKS220B	S2216SKS220R	S2216SKS220V
Lumen/m	783lm	819lm	873lm	873lm	945lm	945lm	996lm			
Gradi Kelvin	1800K	2100K	2700K	3000K	4000K	6000K	6000K	Colorate	Colorate	Colorate
Colore Luce	Warm White, 1800K	Warm White, 2100K	Warm White, 2700K	Warm White, 3000K	Natural White, 4000K	Cold White, 6000K	Cold White, 6000K	Blue light	Red light	Green light
Certificazioni	CE,RoHS,TUV,UL	CE,RoHS,TUV,UL	CE,RoHS,TUV,UL	CE,RoHS,TUV,UL	CE,RoHS,TUV,UL	CE,RoHS,TUV,UL	CE,RoHS,TUV,UL	CE,RoHS,TUV,UL	CE,RoHS,TUV,UL	CE,RoHS,TUV,UL
x				0.4374						
y				0.3992						
CRI	Ra>90	Ra>90	Ra>90	Ra>90	Ra>90	Ra>90	Ra>90			
Alimentazione	24,0Vdc	24,0Vdc	24,0Vdc	24,0Vdc	24,0Vdc	24,0Vdc	24,0Vdc	24,0Vdc	24,0Vdc	24,0Vdc
Gradi lente	120°	120°	120°	120°	120°	120°	120°	120°	120°	120°
Potenza massima	9,0W	9,0W	9,0W	9,0W	9,0W	9,0W	9,0W	9,0W	9,0W	9,0W
Nr. Led/m	182	182	182	182	182	182	182	182	182	182
Dimmerabile	✔	✔	✔	✔	✔	✔	✔	✔	✔	✔
Sezionabile	38,5mm	38,5mm	38,5mm	38,5mm	38,5mm	38,5mm	38,5mm	38,5mm	38,5mm	38,5mm
Lumen/Watt	87	91	97	97	105	105	111			
Dimensione mm	5000mm	5000mm	5000mm	5000mm	5000mm	5000mm	5000mm	5000mm	5000mm	5000mm
Modello led	2216	2216	2216	2216	2216	2216	2216	2216	2216	2216
Attacco	Cavo	Cavo	Cavo	Cavo	Cavo	Cavo	Cavo	Cavo	Cavo	Cavo
MacAdam	SDCM<3	SDCM<3	SDCM<3	SDCM<3	SDCM<3	SDCM<3	SDCM<3			
Confezione	Bag	Bag	Bag	Bag	Bag	Bag	Bag	Bag	Bag	Bag
Classe energetica	G	G	F	F	F	F	F			
Grado IP	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20
Grado IK	IK02	IK02	IK02	IK02	IK02	IK02	IK02	IK02	IK02	IK02

CRI 90+

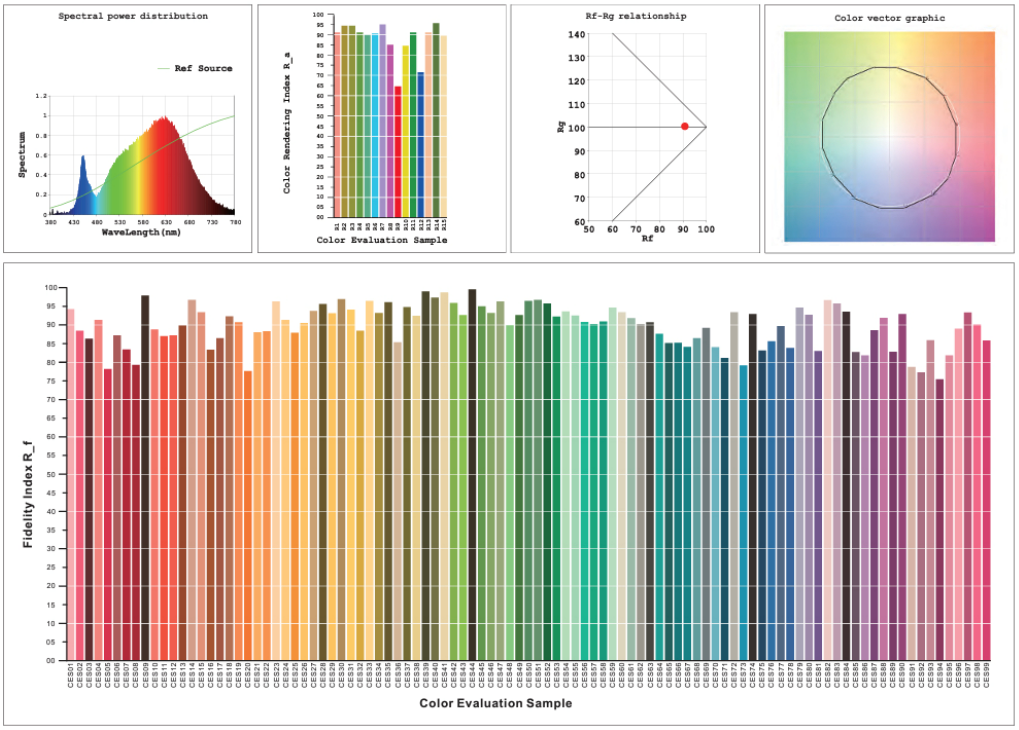


Profili abbinati


PRF068




PRF069




PRF097



PRF098



PRF099



PRF104

